











1000 Line Inks

V420

Description

V420 is a Returnable Glass Bottling (RGB) black MEK ink qualified for use in the Videojet 1000 Line of continuous inkjet (CIJ) printers. This ink is ideal for use in high-speed bottling where codes need to withstand the specific conditions that returnable bottles are exposed to in the production, distribution, and point of sale processes.

Benefits

- iQMark[™] food packaging ink offering:
 - · Compliant with Swiss Food Packaging Ordinance Exclusion List
 - · No European Printing Ink Association (EuPIA) Exclusion List materials
 - No CMR's (Carcinogens, Mutagens, Reproductive Toxins)
- Penetrates and resistant to thin layers of condensation
- Survives pasteurization, retort process, and ice baths
- · Removable with hot caustic wash process
- Resistant to acids, mineral spirits, oils, alcohol, Mil Spec Solvent C, and gasoline

Applications


V420 ink is used to print on returnable glass bottles used in the beverage industry. These bottles are returned from the marketplace, cleaned in a caustic wash process, and refilled shortly thereafter with cold beverages. The bottle surfaces are typically wet, due to condensation from hot, humid environments. Excessive amounts of water must be removed using an air-knife or blow off system for good print quality and adhesion.


This ink delivers excellent adhesion to a wide variety of other substrates including acrylonitrile butadiene styrene (ABS), aluminum, polystyrene, polyvinylchloride (PVC), polycarbonate, polyester, steel, and nylon.










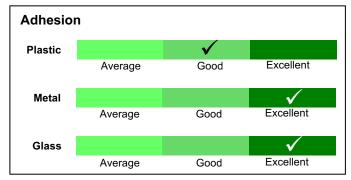









V420

1000 Line Inks

Specifications

Product	Product Type	Color	Solvent Type	Container Size	Shelf life
V420	Ink	Black	MEK	750 ml (-D), 5 L (-K)	12 months*
V723	Make-up	Colorless to pale yellow	MEK	750 ml (-D), 5 L (-K)	24 months*
V905	Cleaner	Colorless to pale yellow	MEK	1 liter (-Q)	30 months*

Storage

Printer Parameters

Qualified Models	Operating Temperature	Operating Humidity	Nozzle Compatibility
12X0, 15X0, 16X0, 1610DH	5-45°C	10-90%	60μm, 70μm

Certifications and Approvals

iQMark™: V420 ink was responsibly designed and manufactured to maximize contrast, adhesion, and uptime while meeting safety, environmental, and regulatory requirements. Every batch is tested to ensure it meets strict quality control specifications.

Heavy Metals: V420 ink meets the requirements of CONEG model legislation including 94/62/EC. For more information, refer to Knowledge Article 1153.**

RoHS: V420 ink meets the requirements of the RoHS 2 Directive 2011/65/EU and Directive (EU) 2015/863. For more information, refer to Knowledge Article 1159.**

REACH: V420 ink is in compliance with EU Regulation (EC) No. 1907/2006 as amended. For more information, refer to Knowledge Article 1156.**

Halogens: V420 ink meets the International Electrotechnical Commission (IEC) definition of Halogen-Free. For more information, refer to Knowledge Article 7920.**

Food Packaging: V420 ink may be used on the non-food contact side of food packaging. The packaging must provide a barrier between the ink and the food. When used in this manner, the inks are in compliance per 21 CFR 170.3(e)(1), Regulation (EC) No. 10/2011, and Regulation (EC) No. 2023/2006. For more information, refer to Knowledge Article 7921.**


Other: V420 ink does not contain major allergens, animal based raw materials, nor organisms, genetically modified or not. For more information refer to Knowledge Articles 1148, 1190, and 1152.**

**Environmental, Health, Safety, and Regulatory information can change without notice, consult the current Safety Data Sheet (SDS) which is available on the Videojet website. Knowledge Articles are available by calling or emailing Videojet.

Order supplies shop.videojet.com
Call 800-843-3610
Email info@videojet.com
Or visit www.videojet.com

RESPONSIBLY DESIGNED AND MANUFACTURED

©2019 Videojet Technologies Inc. - All rights reserved. Videojet Technologies Inc.'s policy is one of continued product improvement. We reserve the right to alter design and/or specifications without notice.





^{*}Store between 2°C and 35°C.