



Laser Marking System

# Videojet® 3130

The 3130 is a 10-Watt CO<sub>2</sub> laser engineered for packaging professionals that require high quality marking at moderate line speeds.

Low power does not mean low performance. The 3130 10-Watt offers all of the performance features found in higher wattage Videojet lasers, but with a power source better matched for moderate line speed applications.

With print speeds up to 1200 characters/sec and line speeds of up to 600 m/min, the 3130 addresses both simple and complex code requirements for a range of substrates including paperboard, glass, painted metal, paper labels, PET, and other plastic materials. The flexibility to meet a broad range of applications makes it an ideal solution for many food, beverage, cosmetics and pharmaceutical packaging operations.



## Uptime Advantage

- Maximum performance and extended laser source life expectancy up to 45,000 hours through optimized total power output
- Air-cooled laser source virtually eliminates maintenance intervals
- Line set-up wizard aids fast product changeovers, eliminating set up trial and error and minimizing planned downtime\*

## Built-in productivity

- Large selection of mark window options offers optimally matched applications for faster marking
- On-screen diagnostics track causes of downtime and help troubleshooting to get the line back up and running quickly\*

## Code Assurance

- Optional CLARiTY Laser Controller offers built-in software features that help reduce operator errors, to ensure products are coded correctly
- High quality, permanent codes help assure product traceability and tamper-proofing
- High resolution marking head delivers consistent, crisp codes

## Simple usability

- Most flexible integration solution with 32 standard beam delivery options
- Quick set up and easy redeployment via detachable umbilical cable for easy routing on the line and simple-to-use accessory connections
- 4 interface options plus a choice of networking communications to match your preferred workflow

\* With optional CLARiTY Laser Controller

# Videojet® 3130

## Laser Marking System

### Marking speed

Up to 1,200 characters/sec.<sup>(1)</sup>

### Line speed

Up to 10 m/sec. (33 feet/sec.)<sup>(1)</sup>

### Marking window

Approx. 25x20 mm to 485x351 mm

### Wavelengths

10.6µm and 9.3µm

### Marking formats

Standard industrial fonts (Type 1 Windows® TrueType®) and Single line fonts  
Machine readable codes (OCR, 2D-matrix, etc.)  
Bar codes: BC25, BC251, BC39, BC128, GS1-128, EAN13, UPC\_A, RSS14, RSS14 Truncated, RSS14 Stacked, RSS14 Stacked Omnidirectional, RSS Limited, RSS Expanded, etc.  
Graphics, logos, symbols, etc.  
Linear, circular, angular, reverse, rotate  
Sequential and batch numbering  
Automatic date, layer and time coding; real-time clock  
Dot mode enables marking 2D codes faster than traditional grid mode

### Laser tube

Sealed CO<sub>2</sub> laser, power class 10-Watt

### Beam deflection

Steered beam with digital high-speed galvanometer scanners

### Focusing

Focal lengths: 64/ 95/ 127/ 190/ 254 mm (2.5/ 3.75/ 5.0/ 7.5/ 10.0 inches);  
63.5/ 85/ 100/ 150/ 200/ 300/ 351/ 400 mm (2.50/ 3.35/ 3.94/ 5.9/ 7.87/ 11.8/ 13.8/ 15.75 inches)

### Multiple operator interface options

Handheld controller  
PC software  
CLARiTY® Laser Controller  
Smart Graph Com

### Language capabilities<sup>(2)</sup>

Arabic, Bulgarian, Czech, Danish, English, German, Greek, Finnish, French, Hebrew, Hungarian, Italian, Japanese, Korean, Dutch, Norwegian, Polish, Portuguese, Romanian, Russian, Serbian, Simplified Chinese, Slovak, Spanish, Swedish, Thai, Traditional Chinese, Turkish, Vietnamese; interface dependent

### Communication

Ethernet, TCP/IP and RS232 optional  
Inputs for encoders and product detector triggers  
3 inputs/ 7 outputs for start/ stop signals, machine/ operator interlocks, alarm outputs; with additional I/Os available  
Customer-specific solution available

### Integration

Direct integration into complex production lines via scripting interface  
Flexible beam delivery options (beam extension unit/ beam turning unit)  
Detachable umbilical for simple integration; available in 3 lengths

<sup>(1)</sup> Maximum marking and line speed is application dependent

<sup>(2)</sup> With optional CLARiTY Laser Controller

### Electrical requirements

100-240 VAC (autorange), ~50/60Hz, 1PH, 0.40KW

### Cooling system

Air cooled

### Environment

Temperature 40-105° F (5-40° C)  
Humidity 10%-90%, non-condensing

### Sealing and safety standards

Supply Unit: IP32, optional IP54 and IP65  
Marking Unit: IP54, optional IP65  
Optional safety module provides Performance Level d (PFL-d) in accordance to EN 13849-1  
IEC/EN 60825-1:2007


### Approximate weight

Supply Unit (IP32/IP54): 16 lbs. (7 kg)  
Marking Unit (IP54): 30lbs (13.6kg)


### Applicable certifications

CE, TÜV/NRTL, FCC  
Compliance (no certification required): ROHS, CDRH/FDA

### Marking unit dimensions - IP54 with SHC60 marking head

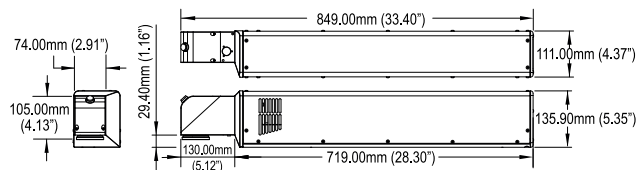

### Supply cabinet dimensions - IP32

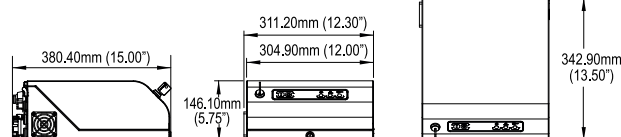

Call **800-843-3610**

Email **info@videojet.com**

or visit **www.videojet.com**

Videojet Technologies Inc.

1500 Mittel Blvd. Wood Dale IL 60191 / USA

©2015 Videojet Technologies Inc. — All rights reserved.

Videojet Technologies Inc.'s policy is one of continued product improvement. We reserve the right to alter design and/or specifications without notice. Windows is a registered trademark of Microsoft Corporation. TrueType is a registered trademark of Apple Computer, Inc.

Part No. SL000576  
ss-3130-us-0815  
Printed in U.S.A.

