



Thermal Transfer Overprinting

DataFlex® 6320

The DataFlex® 6320 is a thermal transfer coding solution for flexible packaging applications requiring high quality variable printing at moderate print speeds.

Designed for high uptime and low cost of ownership, the DataFlex® 6320 is designed to meet a wide range of flexible packaging printing needs. The patented clutchless ribbon drive provides superior uptime by maintaining consistent ribbon tension which virtually eliminates ribbon breaks, while simultaneously ensuring high quality print.

The DataFlex® 6320 is available in two print widths, 32mm and 53mm, to provide the best combination of printhead and ribbon width to deliver the most cost effective solution for your application requirements. Engineered for applications such as vertical form fill seal, the DataFlex® 6320 delivers print speeds up to 250ppm and offers a range of ribbon saving modes to reduce your cost per print.



Uptime Advantage

- Clutchless ribbon drive maintains consistent ribbon tension, virtually eliminating ribbon breaks and ribbon related downtime
- Simplest ribbon cassette design on the market, that makes ribbon replenishment fast, ensuring the coder is back on-line and coding with minimum impact to production

Built-in productivity

- Longer 1200m ribbon length provides more throughput of coded products between ribbon changes
- A wide ranging selection of ribbons, designed specifically to meet the challenges of flexible packaging applications
- Patented bi-directional ribbon drive helps ensure that the absolute minimum ribbon is used during each print cycle, providing more prints per roll of ribbon
- Consistent 0.5mm gap between prints helps ensure highest ribbon efficiency and minimum waste

Code Assurance

- Advanced coder software virtually eliminates set-up errors
- Simple message selection reduces the potential for operator errors
- Range of customer selectable rules and permissions that help to prevent operator error with the printed code

Simple usability

- Seamless mechanical integration with a range of OEM equipment
- Comprehensive communications package for host packaging and control
- Easy to use interface with 8.4" icon based color touch screen
- Intuitive design features make training and operation quick and easy

DataFlex® 6320

Thermal Transfer Overprinting

Printhead

32mm or 53mm, 300dpi (12dot/mm)

Print area

32mm unit

Intermittent printing mode: 32mm wide x 75mm long (RH option),
32mm wide x 68mm long (LH option)
Continuous printing mode: 32mm wide x 200mm long

53mm unit

Intermittent printing mode: 53mm wide x 75mm long (RH option),
53mm wide x 68mm long (LH option)
Continuous printing mode: 53mm wide x 200mm long

Minimum print speed

32mm unit & 53mm unit

Intermittent mode: 50mm/sec
Continuous mode: 0mm/sec

Maximum print speed

32mm unit & 53mm unit

Intermittent mode: 750mm/sec
Continuous mode: 750mm/sec
Max 250ppm

Printing capabilities

Full downloadable font support using TrueType® fonts (including multiple languages and Unicode support); fixed, variable and merged text fields; flexible date/time formats; flexible shift code formats; auto best before date calculations and concession management; calendar rules; auto incrementing decrementing text, counters and bar codes; multiple graphic formats supported (up to maximum print area); link fields to databases; scalable text and text blocks

Bar codes

EAN 8, EAN 13, UPC-A, UPC-E, Code 39, EAN 128, Code 128, ITF, RSS (including 2D composite codes); others available upon request

Operator interface

TFT SVGA 800x600 full-color LCD and touch screen, WYSIWYG print preview, full on-board diagnostics, 3 levels of password protection, extensive language support

Ribbon range

Full assortment of wax/resin and resin ribbons

Maximum ribbon length

Lengths up to 1,200 meters available, dependent on ribbon width and color

Ribbon widths

20mm min, 55mm max

Nominal gap between successive prints

0.5mm

Ribbon saving features

Radial, interleaved, intermittent stripes

Image design software

CLARISOFT®

Network management software

CLARINET®

Remote coder configuration software

CLARITY® Configuration Manager
"Off-line" set up and parameter storage available as standard

Standard installation options master/slave configuration

Up to four DataFlex® 6320 printers controlled via a single CLARITY control unit

Web browser mode

Remote control of the DataFlex® 6320 units from a host packaging machine control box interface

External communications

RS232, Ethernet, USB memory stick and scanner support, Binary and ASCII comms protocols, Windows drivers and ZPL emulations

External inputs/outputs

3 PNP inputs
2 relay outputs and 2 PNP +24V outputs

Air supply

6 Bar, 90psi, uncontaminated


Power supply

90-264V

Operating temperature

2-40°C (35-104°F)*

* With selected ribbons. Actual installation may require additional hardware based on production environment conditions.

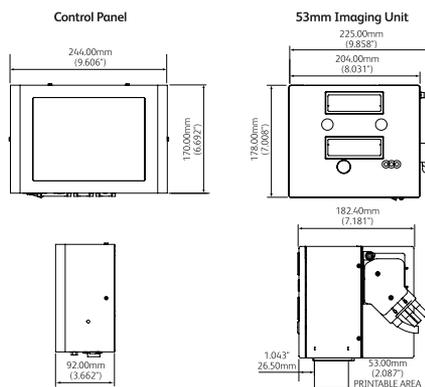

CERTIFIED
ISO 9001
DOCUMENTED QUALITY



Call +353 1 450 2833
Email irelandsales@videojet.com
or visit www.videojet.ie

Videojet Ireland
C2, South City Business Park,
Tallaght,
Dublin 24
Ireland

©2019 Videojet Technologies Inc. — All rights reserved.

Videojet Technologies Inc.'s policy is one of continued product improvement. We reserve the right to alter design and/or specifications without notice.

Printed in U.S.A.

