









1580/1860 Inks

V4212

Description

V4212 is a Returnable Glass Bottling (RGB) black MEK ink qualified for use in the Videojet 1580 and 1860 continuous inkjet (CIJ) printers. This ink is ideal for use in high-speed bottling where codes need to withstand the specific conditions that returnable bottles are exposed to in the production, distribution, and point of sale processes, specifically: cold fill condensation formation, ice baths, and is easily removable using caustic wash solutions.



- · Excellent adhesion to glass, metal, and some plastics
- Penetrates thin layer of condensation
- Survives pasteurization and retort processes
- · Easily removable with caustic wash process
- · Resistant to acids, mineral spirits, and oils
- · Slight alcohol, Mil Spec Solvent C, and gasoline resistance

Applications


This ink is used for coding and marking returnable glass bottles used in the beverage industry. These bottles are returned from the marketplace, cleaned in a caustic wash process, and refilled shortly thereafter with cold beverages. The bottle surfaces are typically wet, due to condensation from hot, humid environments. Excessive amounts of water must be removed using an air-knife or blow off system for good print quality and adhesion.


V4212 delivers excellent adhesion to a wide variety of other substrates including: acrylonitrile butadiene styrene (ABS), aluminum, polystyrene, polyvinylchloride (PVC), polycarbonate, polyester, steel, and nylon.









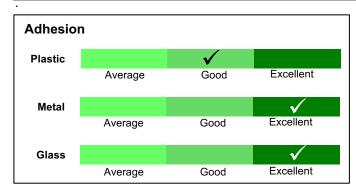









V4212

1580/1860 Inks

Specifications

Product	Product Type	Color	Solvent Type	Container Size	Shelf life
V4212	lnk	Black	MEK	750 ml (-D) 1000 ml (-L)	9 months*
V7217	Make-up	Colorless to pale yellow	MEK	750 ml (-D) 1000 ml (-L)	24 months*
V905	Cleaner	Colorless to pale yellow	MEK	1 liter (-Q)	30 months*

Storage

Printer Parameters

Qualified Models	Operating Temperature	Operating Humidity	Nozzle Compatibility
1580, 1860	15-45°C	10-90%	60μm, 70μm

Certifications and Approvals

iQMark™: V4212 ink was responsibly designed and manufactured to maximize contrast, adhesion, and uptime while meeting safety, environmental, and regulatory requirements. Every batch is tested to ensure it meets strict quality control specifications.

Heavy Metals: V4212 ink meets the requirements of CONEG model legislation including 94/62/EC. For more information, refer to Knowledge Article 1153.**

RoHS/WEEE: V4212 ink meets the requirements of the RoHS 2 Directive 2011/65/EU and Directive (EU) 2015/863. For more information, refer to Knowledge Article 1159.**

REACH: V4212 ink is in compliance with EU Regulation (EC) No. 1907/2006 as amended. For more information, refer to Knowledge Article 1156.**

Halogens: V4212 ink meets the International Electrotechnical Commission (IEC) definition of Halogen-Free. For more information, refer to Knowledge Article 7920.**

Food Packaging: V4212 ink may be used on the non-food contact side of food packaging. The packaging must provide a barrier between the ink and the food. When used in this manner, the inks are in compliance per 21 CFR 170.3(e)(1), Regulation (EC) No. 10/2011, and Regulation (EC) No. 2023/2006. For more information, refer to Knowledge Article 7921.**

Other: V4212 ink does not contain major allergens, animal based raw materials, nor organisms, genetically modified or not. For more information refer to Knowledge Articles 1148, 1190, and 1152.**

**Environmental, Health, Safety, and Regulatory information can change without notice, consult the current Safety Data Sheet (SDS) which is available on the Videojet website. Knowledge Articles are available by calling or emailing Videojet.

Order supplies shop.videojet.com
Call 800-843-3610
Email info@videojet.com
Or visit www.videojet.com

©2018 Videojet Technologies Inc. - All rights reserved. Videojet Technologies Inc.'s policy is one of continued product improvement. We reserve the right to alter design and/or specifications without notice.

Videojet Technologies Inc. 1500 Mittel Blvd. Wood Dale IL 60191 / USA



^{*}Store between 2°C and 35°C.