



Continuous Inkjet

# Videojet® 1880 +

Experience increased efficiency and performance, maximized productivity, and proven reliability for high-speed applications with the 1880 + printer.

The 1880 + continuous inkjet (CIJ) printer is built on the high-speed 1880 platform, and redefines excellence through enhanced design and comprehensive integrated connectivity options. This printer delivers non-contact inkjet printing for almost any substrate, including flat or curved surfaces.

With a built-in vital sign monitoring system, smart alerts, on-demand remote technical support, Wi-Fi connectivity, and an advanced automated troubleshooting program, the 1880 + anticipates potential printer issues in time for you to avoid them and enables you to recover faster should downtime still occur.



## Harness digital capabilities

- Reduce downtime with the Videojet MAXIMiZE™ advanced diagnostics suite
- React sooner to faults and minimize the need for on-site service calls with VideojetConnect Remote Service™
- Recover from faults more quickly with RapidRecover™ automated troubleshooting engine

## Right code at the right quality

- Clean the printhead only when needed thanks to the unique ink build-up sensor
- Simplify printhead cleaning to just a push of a button with the Auto-rinse feature
- Remove potential for human error with the suite of line integration and code management capabilities

## Minimize operator interventions

- Go longer between printhead cleanings with intelligent start-stop sequence
- Increase make-up cartridge changeover interval by up to 2x with reduced make-up consumption and 1L cartridge option
- Easily accommodate operator-performed annual maintenance that takes just 5 minutes per year

## Natural fit in your line

- Achieve maximum line productivity and reduce downtime with easy-to-replace SmartCell™ components
- Reduce training from the intuitive SIMPLICITY™ user interface and on-board videos that guide users through common tasks
- Select from a wide variety of safer, more sustainable inks engineered to meet your application

# Videojet® 1880 +

## Continuous Inkjet

### Line speed capability

Can print 1 to 5 lines of print at speeds of up to 1.097fpm (334mpm)  
(10 characters per inch, single line of print)

### Font matrix configuration

Single-line: 4x5, 5x5, 4x7, 5x7, 7x9, 9x12, 10x16, 16x24, 25x34  
Twin-line: 4x5, 5x5, 4x7, 5x7, 7x9, 9x12, 10x16  
Tri-line: 4x5, 5x5, 4x7, 5x7, 7x9  
Quad-line: 4x5, 5x5, 4x7, 5x7  
Five-line: 5x5

### Linear bar codes

UPC A&E; EAN 8 & 13; Code 128 A, B & C; UCC/EAN 128;  
Code 39; Interleaved 2 of 5; GS1

### DataMatrix codes

10x10, 12x12, 14x14, 16x16, 8x18, 18x18, 20x20, 22x22, 24x24, 12x26, 26x26,  
8x32, 32x32, 12x36, 16x36, 16x48

### QR codes

21x21, 25x25, 29x29, 33x33  
Error correction mode L, M, Q or H

### Nominal character height

Selectable from 0.079" (2mm) to 0.40" (10mm), depending on font

### Throw distance

Optimal: 0.472" (12mm)  
Range: 0.197" (5mm) to 0.591" (15mm)

### User interface

10.4" 16:9 high-response TFT-LCD touch screen  
WYSIWYG touch to edit message editing

### Custom logo/graphics

Can be created via optional CLARISOFT™ software\*

### Character sets

Chinese, Russian/Bulgarian, Turkish/Scandinavian, Romanian, Greek, Arabic,  
Japanese/Kanji, Hebrew, Korean, East European and European/American

### Languages and interface options

English, Arabic, Bulgarian, Czech, Danish, Dutch, Finnish, French, German,  
Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish,  
Portuguese, Romanian, Russian, Serbian, Simple Chinese, Spanish, Swedish,  
Thai, Traditional Chinese, Turkish, and Vietnamese

### Input/output

Product detect input; Encoder input; Beacon (Alarm light) output; Relay output;  
USB 2.0 (2x); Ethernet LAN™; Built-in Wi-Fi

### Message storage

More than 250 complex messages

### Environmental protection

IP55 standard, no plant air required, stainless steel cabinet  
IP66 protected electronics optional

### Printhead

CleanFlow™ including positive air, no plant air required (optional)  
Diameter: 1.63" (41.3mm)  
Length: 10.62" (269.8mm)

### Printhead umbilical

Ultra flexible Length: 9.84' (3m) optional 19.69' (6m)  
Diameter: 0.91" (23mm)  
Bend radius: 4.0" (101.6mm)

### Make-up consumption

As low as 3.5ml per hour (MEK at 20°C)

### Fluids containers

Ink and Make-up Smart Cartridge™ 1.06 qt (1000ml); optional 0.793 qt (750ml)

### Temperature/humidity range

32°F to 122°F (0°C to 50°C)  
0% to 90% RH non-condensing

*With selected inks; actual installation may require additional hardware  
based on production environment conditions*

### Electrical requirements


Nominal supply power 100-120 / 200-240 VAC at 50/60 Hz, 70W

### Approximate weight

Unpacked and dry: 46.3lbs. (21kg)

### Options

Dust protection kit with CleanFlow™ technology  
Dry air kit for high humidity (requires plant air)  
Cellular communication  
RS232 connector kit (USB to Serial DIN-5 male adapter)  
SIMPLICiTY™ Workflow Modules  
Wide range of accessories

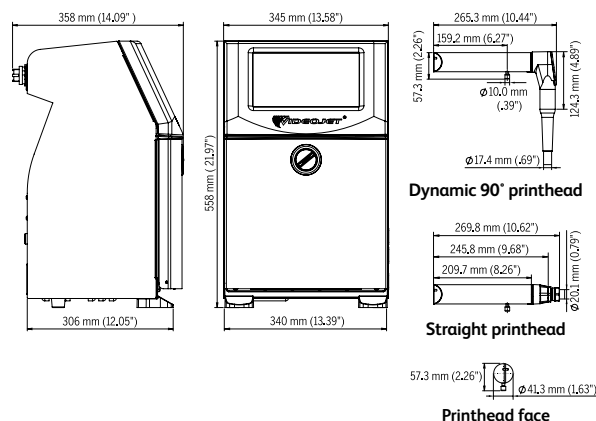

\* CLARISOFT™ Package Coding Design software required for certain bar codes and other advanced functionality.



Call (65) 6444 4218  
Email [marketing.singapore@videojet.com](mailto:marketing.singapore@videojet.com)  
or visit [www.videojet.sg](http://www.videojet.sg)

Videojet Technologies (S) Pte Ltd  
No. 11 Lorong 3 Toa Payoh  
Block B #03-20/21 Jackson Square  
Singapore 319579

© 2023 Videojet Technologies Inc. — All rights reserved.  
Videojet Technologies Inc.'s policy is one of continued product improvement.  
We reserve the right to alter design and/or specifications without notice.

Part No. SL000728  
ss-1880-plus-en-sg-0923

